




# ergolastec<sup>®</sup> FLOOR




Version 03/2020

## The hard-wearing floor covering for high mechanical stress.



- o The soft back of the mat's suction cup guarantees **high anti-skid properties and noise insulation.**
- o The ERGOLASTEC floor mat with a flat structured surface ensures **good trafficability.**
- o The industrial floor withstands **heavy mechanical loads (e.g. forklifts and lift trucks).**
- o The industrial floor is the ideal floor for **production halls, storage and order picking areas, and garages.**
- o The ERGOLASTEC floor mat is suitable for areas with **intensive walking and working traffic.**
- o The flame-retardant rubber mat has the **fire protection class Bfl-S1.**

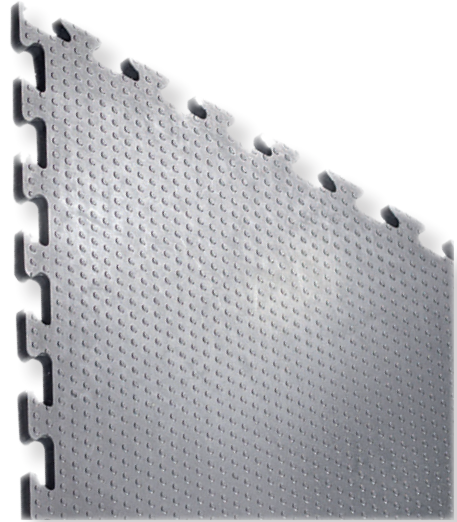

Surface	Size	Characteristic	Material	Hardness	Colour
FLOOR Dry	916 x 572 x 10 mm*	Insulating noise-insulating Trafficable (pallet truck, ...) Antistatic 6,4 kg	SBR***	85 Shore A	

\* Tolerances according to DIN ISO 3302 - 1 M4; \*\* In accordance with EN 13501 resistant to short-term sparks and welding beads; \*\*\* It may cause slight discoloration on light soils

## Surface and backside geometries



DRY = dry working conditions