

ergolastec[®] OIL



The oil-resistant ergonomic mat with the AGR seal of approval.





- o Suitable for **oil-resistant workstations**, such as workbenches, turning and milling machines or chemical laboratories.
- o The rubber mat is resistant to **various oils**, greases, commercially available cooling lubricants, fuels, and non-polar solvents.
- o ideal for workplaces with a **high risk of slipping**.
- o **Recommendable: mat with quartz coating** to improve slip resistance on extremely slippery workplaces.



| Surface | Size | Fire protecting class | Material | Hardness | Colour |
|----------------|----------------------|-----------------------|----------|------------|--------|
| OIL Dry | 1350 x 1000 x 16 mm* | Bfl-s1** | NBR*** | 55 Shore A | |
| OIL Wet | 1350 x 1000 x 20 mm* | Bfl-s1** | NBR*** | 55 Shore A | |
| OIL Diamond | 1350 x 1000 x 20 mm* | Bfl-s1** | NBR*** | 55 Shore A | |
| OIL Superdrain | 1350 x 1000 x 18 mm* | Bfl-s1** | NBR*** | 55 Shore A | |

* Tolerances according to DIN ISO 3302 - 1 M4; ** In accordance with EN 13501 resistant to short-term flying sparks and welding beads *** It may cause slight discoloration on light soils

Surface and backside geometries

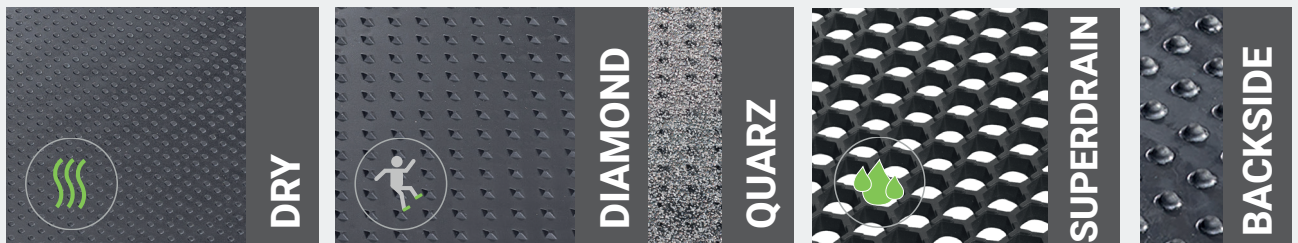

DRY = dry working conditions; DIAMOND = slippery working conditions; QUARTZ = Very slippery working conditions; SUPERDRAIN = wet working conditions