



The workplace mat for extremely slippery workplaces with the AGR seal of approval.

- o Suitable for particularly oily and slippery workplaces, such as lathes and milling machines
- o The mat is resistant to various oils, greases, commercially available cooling lubricants, fuels and non-polar solvents
- o Ideal for workplaces with a high risk of slipping
- o The durable mat - suitable for multi-shift operation (24/7)
- o Flexible connection system
- o The ERGOLASTEC® OIL/ FIRE is flame retardant in accordance with EN 13501-1/floor covering test. EN 13501-1/ floor covering test and therefore also suitable for use in public buildings
- o The tested rubber mat enables use at grinding and welding workstations**
- o Heat resistance against short-lived flying sparks and welding beads

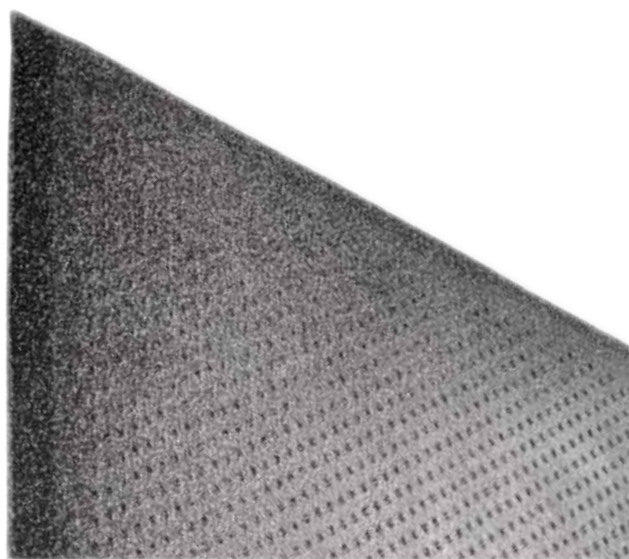

NEW	Surface with RFLX Backside	Size	Fire protecting class	Material	Hardness	Weight	Colour
	OIL Diamond Quarz****	1350 x 1000 x 20 mm*	Bfl-s1**	NBR***	65 Shore A	17 ± 1 kg	

SURFACE AND BACKSIDE GEOMETRIES



QUARZ



BACKSIDE



OIL/ FIRE_{QUARZ}



The mat resistant to oil,
grease and gasoline



Flame-retardant mat
Bfl-s1



Slippery working conditions

