



## The workplace mat for extremely slippery workplaces - with the AGR seal of approval.

- o Suitable for oil-resistant workplaces such as workbenches, lathes and mills or chemical laboratories.
- o The mat is resistant to various oils, greases, commercially available coolants, lubricants, fuels and nonpolar solvents
- o Ideal for workplaces with a high slipping risk
- o Very good slip resistance

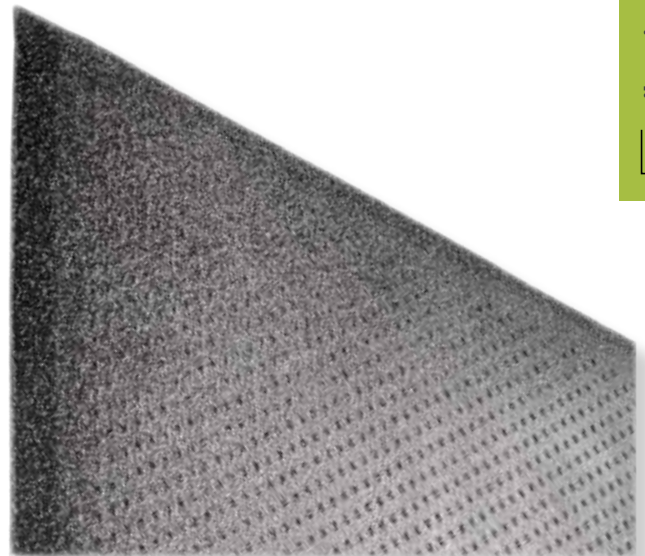

Surface	Size	Fire protecting class	Material	Hardness	Weight	Colour
OIL Diamond Quarz****	1350 x 1000 x 20 mm*	Bfl-s1**	NBR***	55 Shore A	20 ± 1 kg	

## Surface and backside geometries

**QUARZ****BACKSIDE**

The mat resistant to oil, grease and gasoline



Slippery working conditions



Flame-retardant mat  
Bfl-s1

\* Tolerances according to DIN ISO 3302 - 1 M4; \*\* In accordance with EN 13501 resistant to short-term flying sparks and welding beads

\*\*\* It may cause slight discoloration on light soils

\*\*\*\* The quartz sand coating is subject to natural wear and the product should be checked in advance with regard to the used media.

