







The robust and trafficable rubber floor protection mat

- o Due to its different grades of hardness, the rubber mat is **ideal for work areas** on which picking carts, hand-driven and E-pallet trucks, forklift trucks, etc. are driven
- o MOOVETEC rubber mat **insulates against cold from the floor**
- o The flat cylindrical studs on the bottom ensure **high stability and firm hold** when driving over or setting down components.

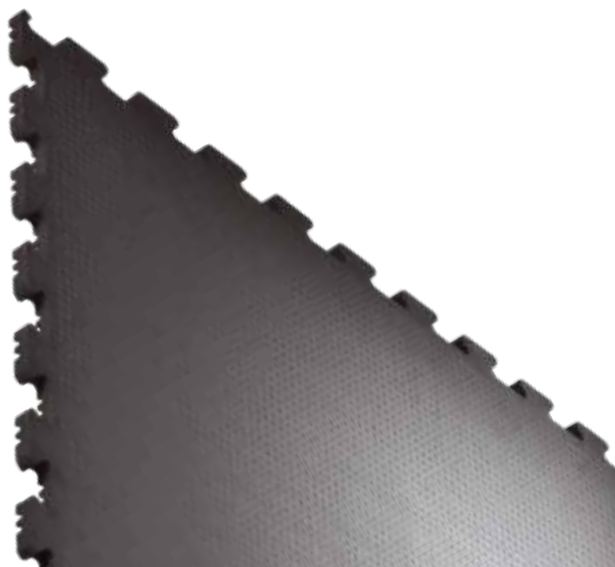

m universal / combinable

Surface	Size	Properties	Material	Hardness	Weight	Colour
SOLID- W Dry soft (Light loads, picking trolley, swivel chair)	1350 x 1000 x 16 mm*	Antistatic	SBR**	55 Shore A	25 ± 1 kg	
SOLID- H Dry hard (Medium loads, hand pallet trucks)	1350 x 1000 x 16 mm*	Antistatic	SBR**	70 Shore A	25 ± 1 kg	
SOLID- F Dry very hard (High loads, forklifts, electric pallet trucks)	1350 x 1000 x 16 mm*	Antistatic	SBR** Bfl-s1	85 Shore A	30 ± 1 kg	
SOLID- G Dry grey (Light loads, picking trolley, swivel chair)	1350 x 1000 x 16 mm*		NBR** oil resistant	55 Shore A	25 ± 1 kg	
SOLID- ESD Dry soft ESD (Medium loads, hand pallet truck)	1350 x 1000 x 16 mm*	ESD	SBR**	55 Shore A	25 ± 1 kg	

Surface and backside geometries



DRY



BACKSIDE

ADVANTAGE

The SOLID floor protection mat can be **combined with an ERGOLASTEC** ergonomic mat



forklift



lift truck



Electric pallet truck



order picking trolley

For further information see **table on page 2**

